


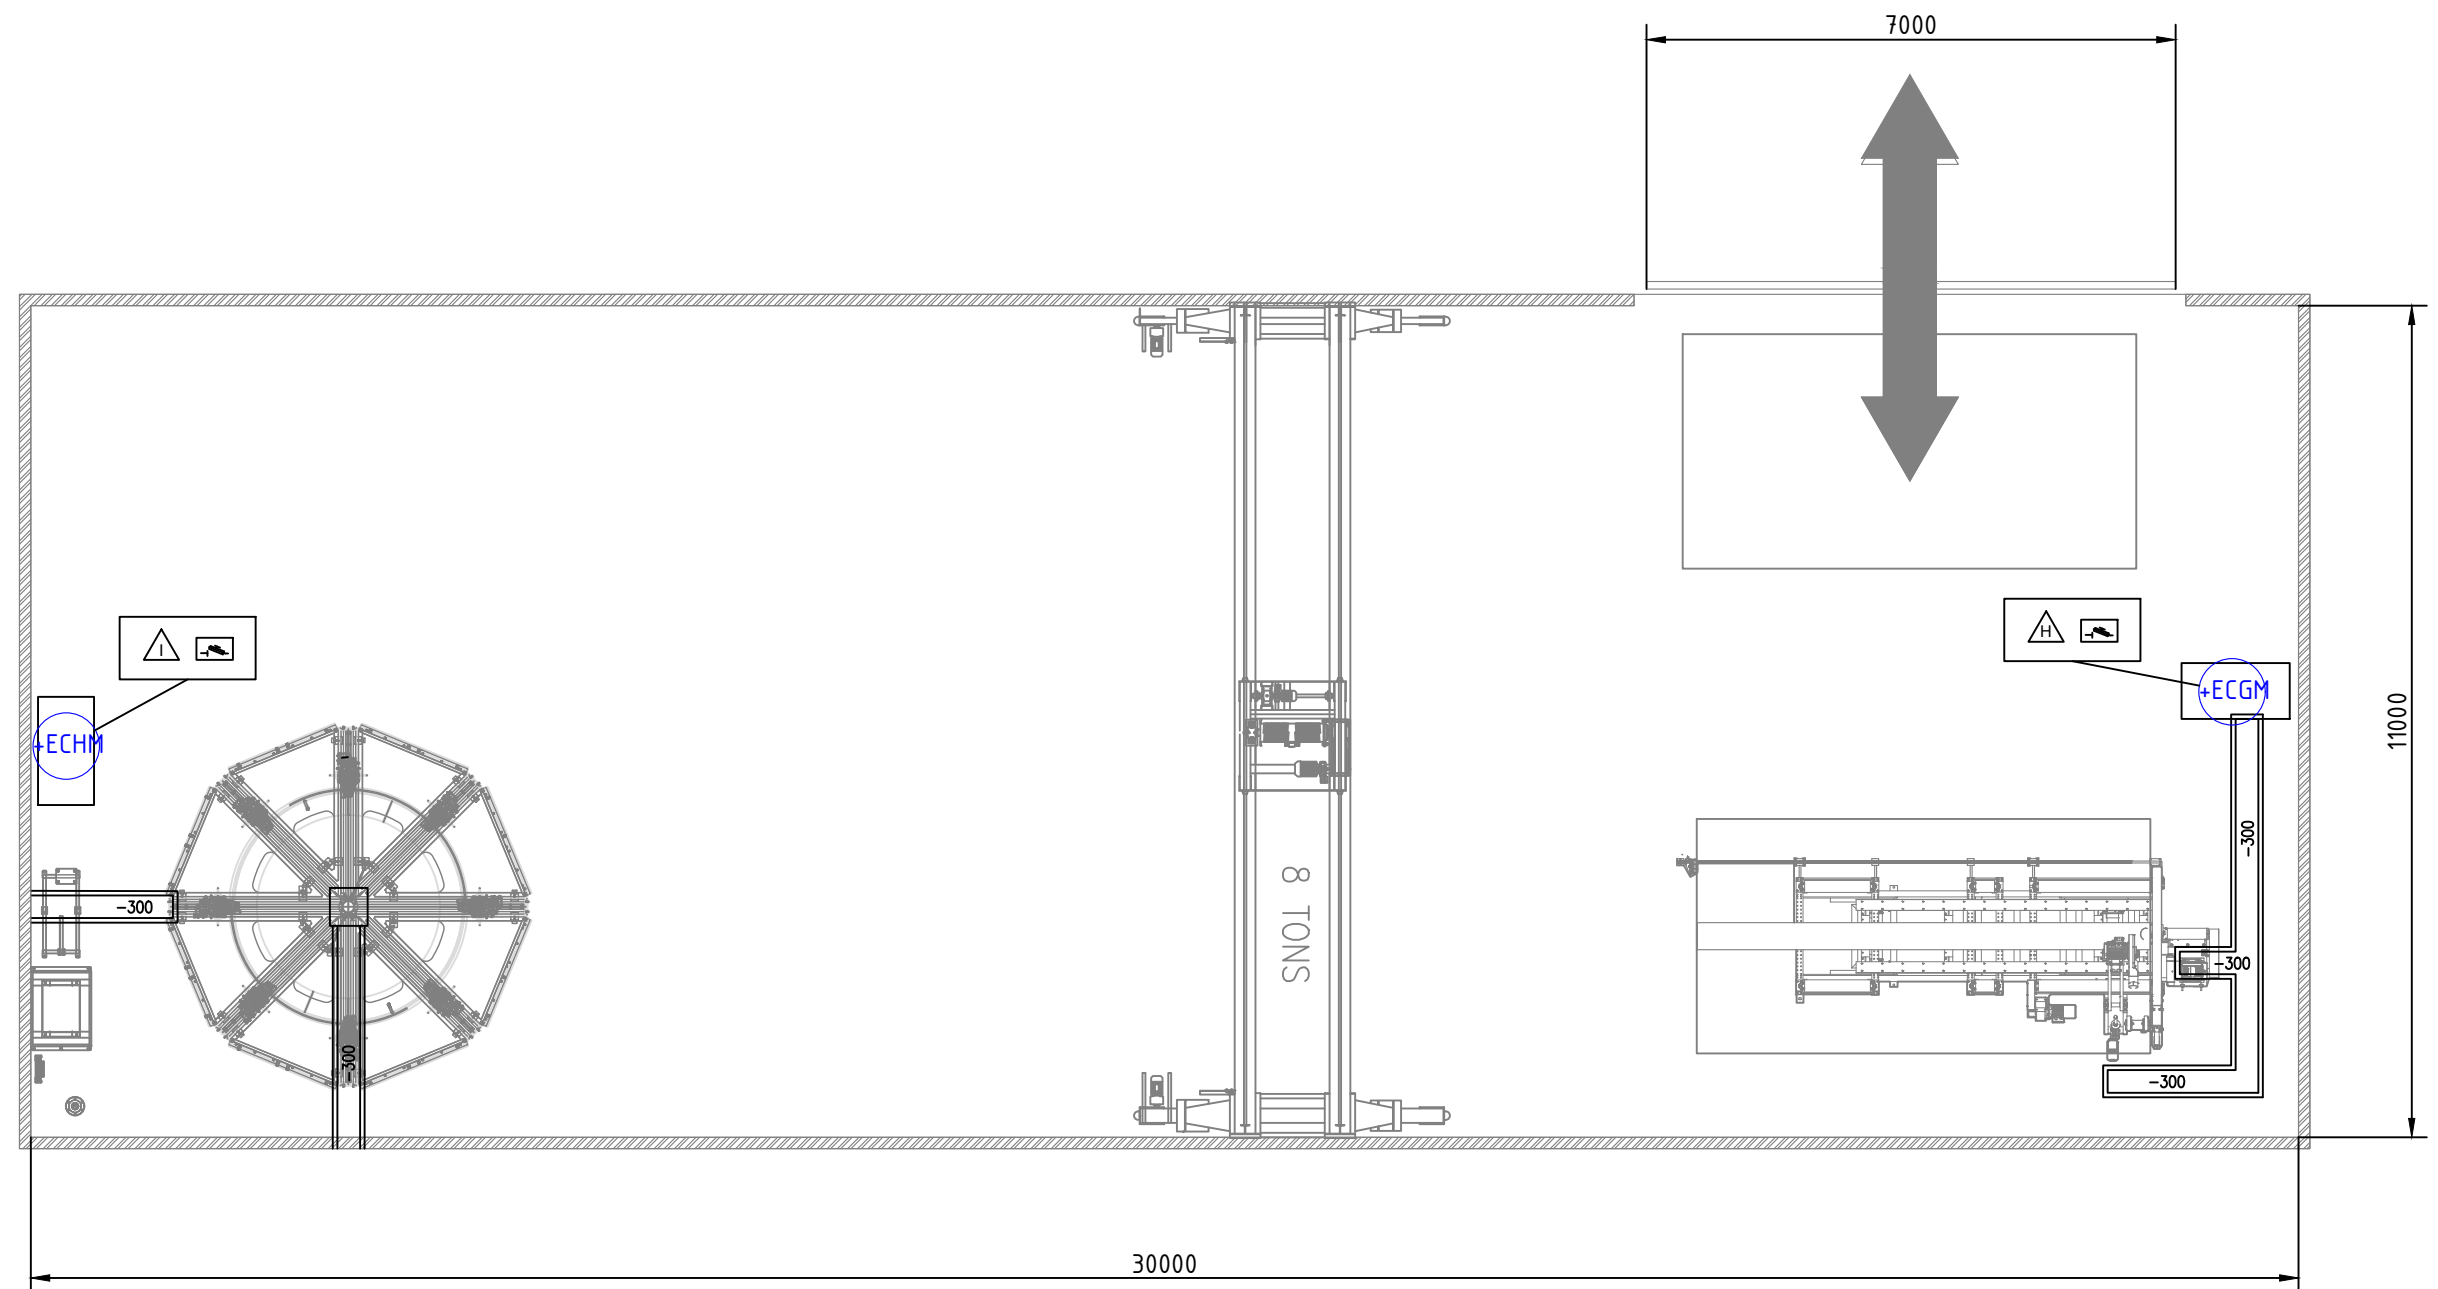

SYMBOLS		
MACHINE	COUPLING GROOVING MACHINE	COUPLING HYDROTESTER MACHINE
VOLTAGE	480 V	480 V
POWER	50 Kw	15 Kw
FREQUENCY	60 Hz	60 Hz
PF	0,75	0,75

H	COUPLING GROOVING MACHINE PANEL - Panel is alongside the machine. Additional cable length of 800mm from the floor level is needed.
I	COUPLING HYDROTESTER PANEL - Additional cable length of 800mm is needed.

		TOPFIBRA d.o.o. Ulica 25.maja 27, 6258 Prestranek, Slovenia, EU www.topfibra.eu / Phone: +386 8 200 1500			
PROJECT:		CLIENT INFORMATION:			
C144-2021-HPUSA		HPUSA 1413 E. Richey Rd, Houston, Texas; 77073-3508			
DESCRIPTION:		SIGN:		DATE:	
AUXILIARY LAYOUT Power supply		DRAWN: PB		10.5.2022	
DOC. TYPE:		CHECKED: MAURICIO FACCHINETTI		10.5.2022	
DOCUMENT NO.:		APPROVED: MAURICIO FACCHINETTI		10.5.2022	
DRW		TF144-04-01		00	
		SCALE:		SHEET OF:	
		1:100		1 1	
				A3	